


REVOLUTION[™] MRL HOLELESS FRONT

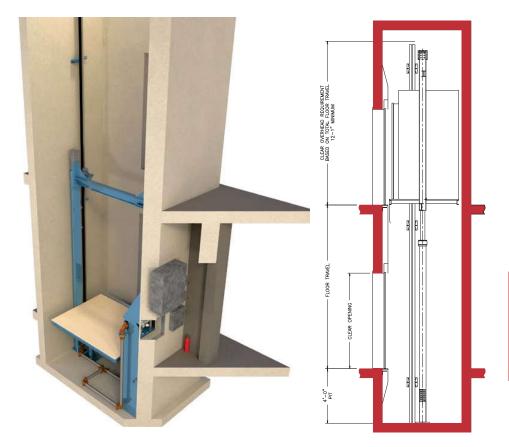



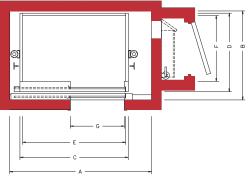

MRL PASSENGER I	DUAL HOLELESS SING	FRONT OPEN ONLY				
Туре	Capacity (lbs)	Hoistway Width x Depth A x B	Platform Width x Depth C x D	Inside Cab Width x Depth E x F	Door Type	Door Width G
	2500	9'-2" x 5'-10"	7'-0" x 5'-1"	6'-8" x 4'-3"	Single Speed	3'-6"
	2500	9'-2" x 5'-10"	7'-0" x 5'-1"	6'-8" x 4'-3"	Center Opening	3'-6"
	3000	9'-2" x 6'-3"	7'-0" x 5'-6"	6'-8" x 4'-8"	Single Speed	3'-6"
Passenger	3000	9'-2" × 6'-3"	7'-0" x 5'-6"	6'-8" x 4'-8"	Center Opening	3'-6"
	3500	9'-2" x 6'-11"	7'-0" x 6'-2"	6'-8" x 5'-4"	Single Speed	3'-6"
	3500	9'-2" x 6'-11"	7'-0" x 6'-2"	6'-8" x 5'-4"	Center Opening*	3'-6"
	4000	10'-2" x 6'-11"	8'-0" x 6'-2"	7'-8" x 5'-4"	Single Speed	4'-0"
	4000	10'-2" x 6'-11"	8'-0"x 6'-2"	7'-8" x 5'-4"	Center Opening	4'-0"
	4000	8'-4" x 9'-6"	6'-0"x 8'-8"	5'-8" x 7'-8 1/2 "	Two Speed	4'-0"
Hospital	4500	8'-4" x 9'-11"	6'-0" x 9'-1"	5'-8" x 8'-1 1/2"	Two Speed	4'-0"
	5000	9'-0" x 10'-5"	6'-0"x 9'-7"	5'-8" x 8'-7 1/2"	Two Speed	4'-6"


NOTES:

- 2000-lb. car complies with NEII recommendations for car to accommodate wheelchair.
- 3500-lb. and larger cars comply with NEII recommendations for car to accommodate ambulance size stretcher when equipped with single slide doors.



*Center parting doors do not allow stretchers.

REVOLUTION[™] MRL HOLELESS FRONT & REAR

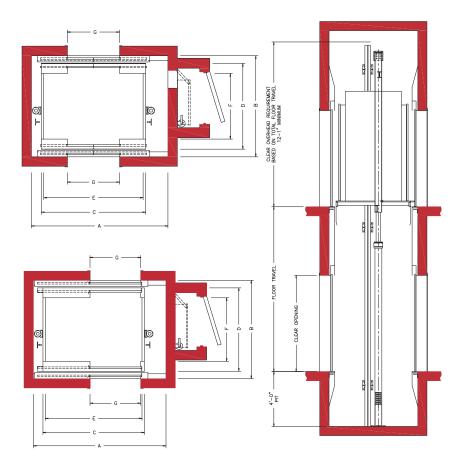

DESCRIPTION:

This design utilizes a 1'-6" x 4'-0" control space in place of a 5'-6" x 7'-0" typical machine room while delivering the same performance as our traditional holed and holeless elevators.

ADVANTAGES:

- Saves the building owner costs associated with a typical machine room (construction, HVAC, space).
- Suitable for mod or new construction.
- Can be used for existing hoist ways and non-standard dimensions.
- Control space can be located anywhere in the building and within 50'-0" of the hoist way.
- Utilizes a standard 4'-0" deep pit

	DUAL HOLELESS SING	FRONT & REAR OPEN				
Туре	Capacity (lbs)	Hoistway Width x Depth A x B	Platform Width x Depth C x D	Inside Cab Width x Depth E x F	Door Type	Door Width G
2500	9'-2" x 6'-9 1/2"	7'-0" x 5'-9"	6'-8" x 4'-4 3/4"	Single Speed	3'-6"	
2500	9'-2" x 6'-9 1/2"	7'-0" x 5'-9"	6'-8" x 4'-4 3/4"	Center Opening	3'-6"	
3000	9'-2" x 7'-1 1/2"	7'-0" x 6'-1"	6'-8" x 4'-8 3/4"	Single Speed	3'-6"	
3000	9'-2" x 7'-1 1/2"	7'-0" x 6'-1"	6'-8" x 4'-8 3/4"	Center Opening	3'-6"	
3500	9'-2" x 7'-9 1/2"	7'-0" x 6'-9"	6'-8" x 5'-4 3/4"	Single Speed	3'-6"	
3500	9'-2" x 7'-9 1/2"	7'-0" x 6'-9"	6'-8" x 5'-4 3/4"	Center Opening*	3'-6"	
4000	10'-2" x 7'-9 1/2"	8'-0" x 6'-9"	7'-8" x 5'-4 3/4"	Single Speed	4'-0"	
4000	10'-2" x 7'-9 1/2"	8'-0" x 6'-9"	7'-8" x 5'-4 3/4"	Center Opening	4'-0"	
Hospital	4000	8'-2" x 10'-7 1/2"	6'-0" x 9'-4"	5'-8" x 7'-8 3/4"	Two Speed	4'-0"
	4500	8'-2" x 11'-0 1/2"	6'-0" x 9'-9"	5'-8" x 8'-1 3/4"	Two Speed	4'-0"
	5000	9'-0" x 11'-6 1/2"	6'-0" x 10'-3"	5'-8" x 8'-7 3/4"	Two Speed	4'-6"

IMPORTANT:

This information is intended for preliminary planning. We have attempted to include the basic data required for your planning efforts. For details about specific or custom installations, please contact your local Canton Elevator representative or contact us directly.

