

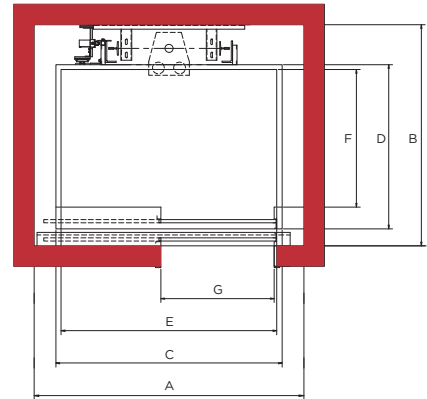


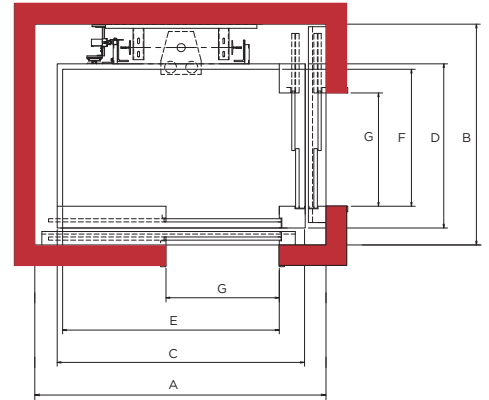

# FREEDOM® HYDRAULIC CANTILEVER HOLELESS

## FRONT / FRONT & SIDE

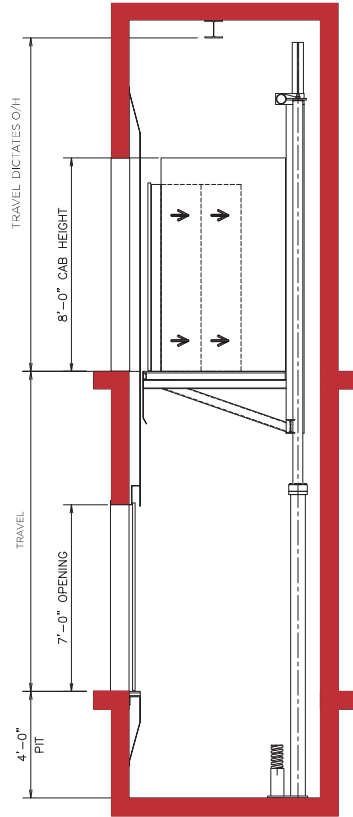

### Description:

The design utilizes a hydraulic single stage or telescopic jack and is installed directly on the pit floor. The platform is supported by a cantilevered car frame with the jack and rails located on one side of the hoistway.

### Advantages:

- Jack hole is not required, eliminating the cost of drilling and the risk of ground contamination from oil leak
- Accommodates front, rear and side opening configurations
- Allows for glass walls on sides where equipment is not located
- Allows for glass walls on sides where equipment is not located

| PASSENGER CANTILEVER HOLELESS |                |                     |                     |                       |            |              |              |
|-------------------------------|----------------|---------------------|---------------------|-----------------------|------------|--------------|--------------|
| Type                          | Capacity (lbs) | Hoistway            | Platform            | Inside Cab            | Front/Side | Door Type    | Door Width G |
|                               |                | Width x Depth A x B | Width x Depth C x D | Width x Depth E x F   |            |              |              |
| Passenger                     | 2000           | 7'-4" x 6'-10"      | 6'-0" x 5'-1"       | 5'-8" x 4'-3"         | F          | Single Speed | 3'-0"        |
|                               | 2000           | 8'-0" x 6'-10"      | 6'-8" x 5'-1"       | 5'-8 3/8" x 4'-2 7/8" | F/S        | 1sp & 2sp    | 3'-0"        |
|                               | 2500           | 8'-4" x 6'-10"      | 7'-0" x 5'-1"       | 6'-8" x 4'-3"         | F          | Single Speed | 3'-6"        |
|                               | 2500           | 9'-0" x 6'-10"      | 7'-8" x 5'-1"       | 6'-8 3/8" x 4'-2 7/8" | F/S        | 1sp & 2sp    | 3'-6"        |
|                               | 3000           | 8'-4" x 7'-3"       | 7'-0" x 5'-6"       | 6'-8" x 4'-8"         | F          | Single Speed | 3'-6"        |
|                               | 3000           | 9'-0" x 7'-3"       | 7'-8" x 5'-6"       | 6'-8 3/8" x 4'-7 7/8" | F/S        | 1sp & 2sp    | 3'-6"        |

### NOTES:

- 2000-lb. car complies with NEII recommendations for car to accommodate wheelchair.
- Consult factory for any nonstandard sizes not shown on the charts above.

